



THIS DRAWING IS THE PROPERTY OF THE U.S. NAVY AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM THE U.S. NAVY.

KEY H.S. BOW
1.00 ± 1.00

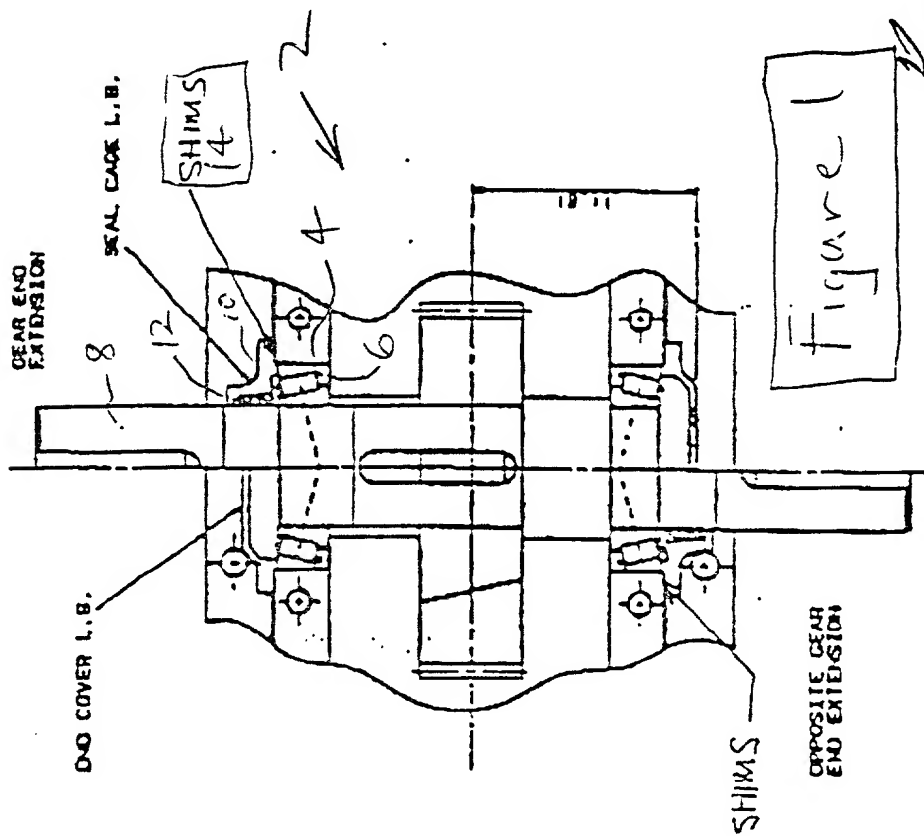


SINGLE ENDED L.S. SHAFT

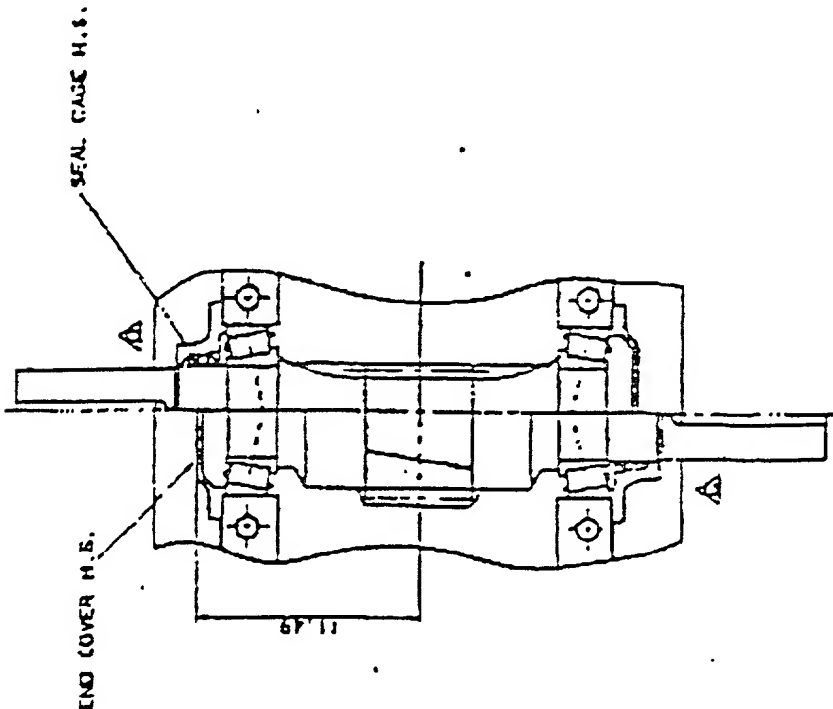


SINGLE ENDED H.S. SHAFT

See sketch 8/29/00
20/08/08
8/28/00

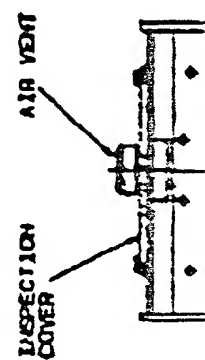

copying

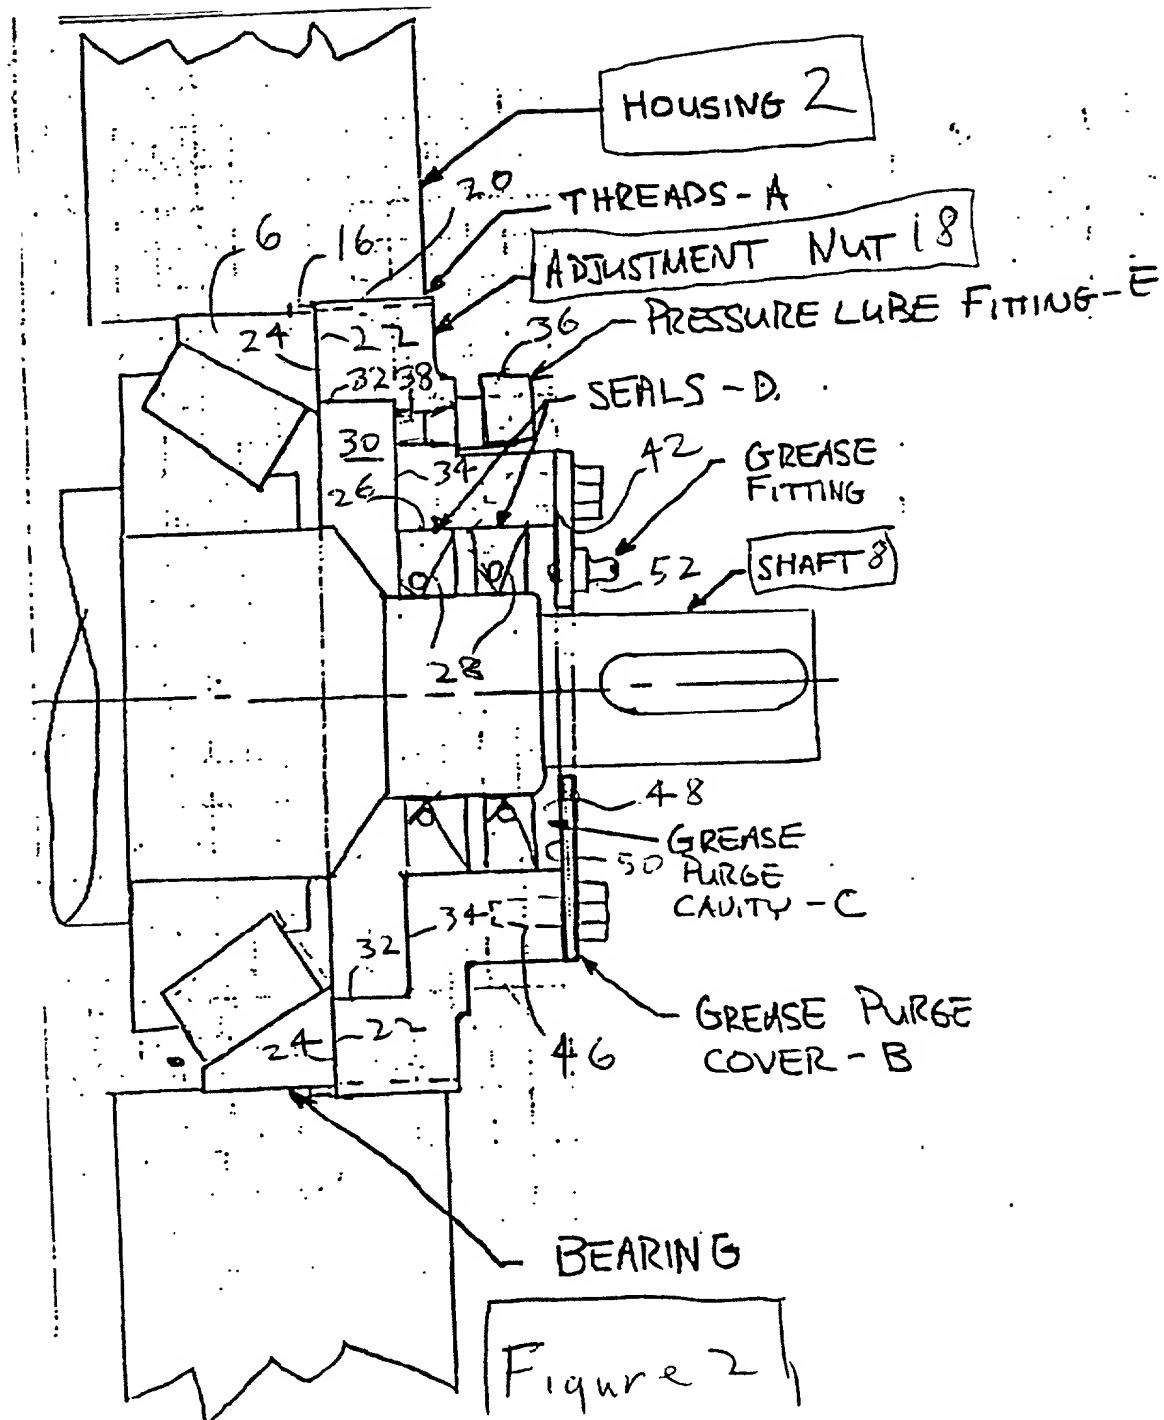

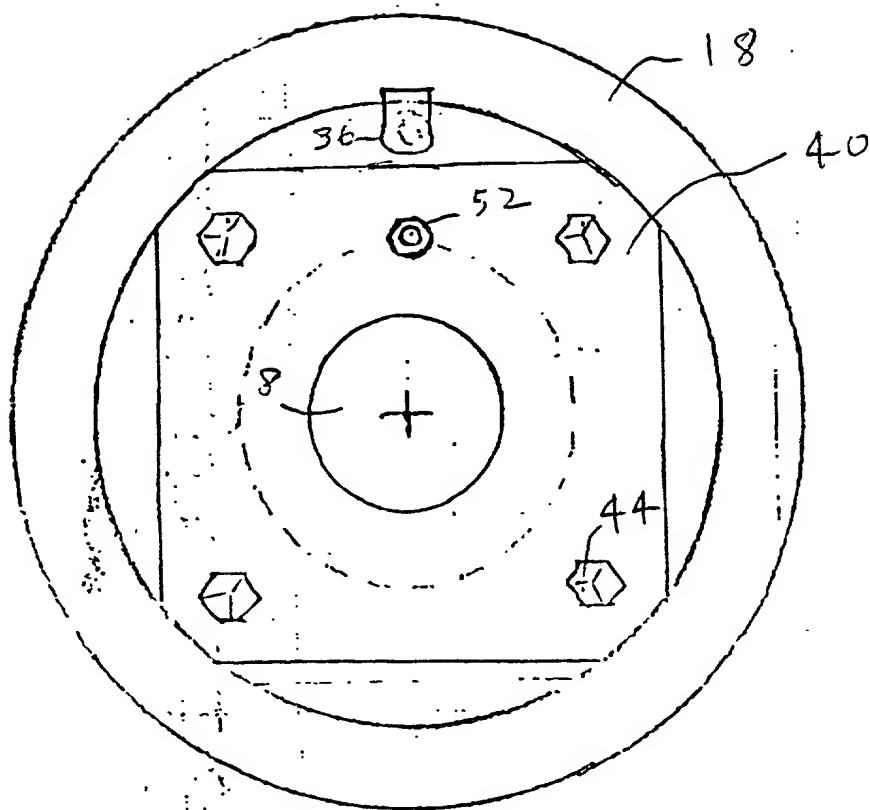


Figure 3

FIG. 4 is a cross-sectional view of the device showing the internal structure and the location of the threads (A) and the nose (B).

THREADS (A)

NOSE (B)

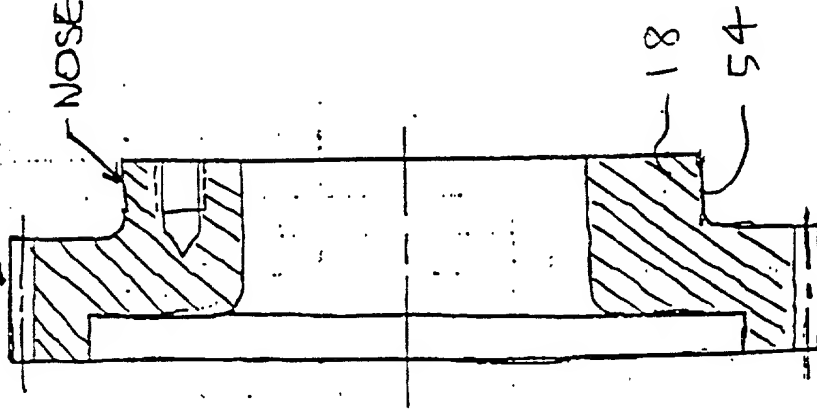


Figure 4

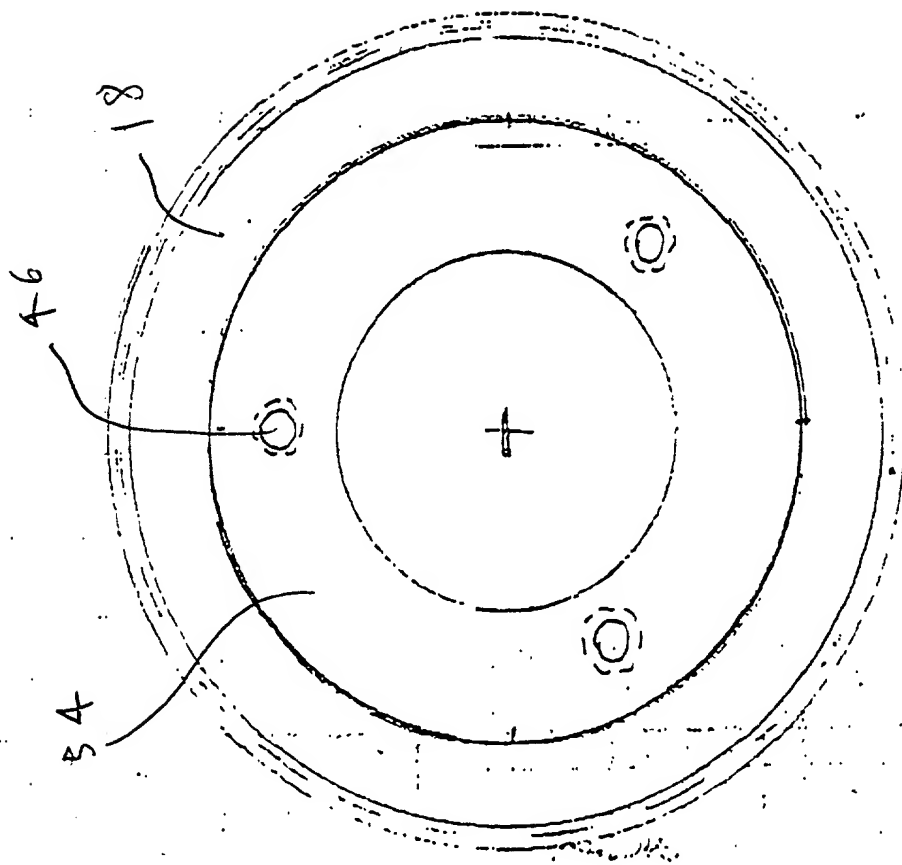


Figure 5

THREADS - C


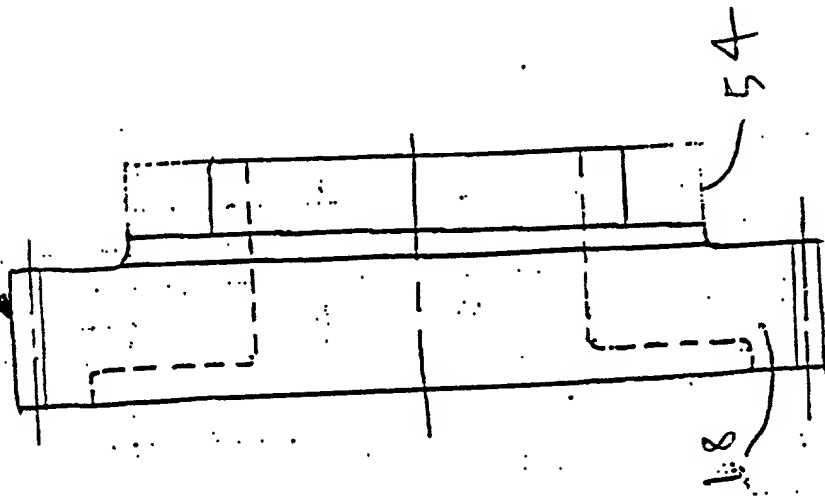


Figure 6

THREADED
HOLE - B

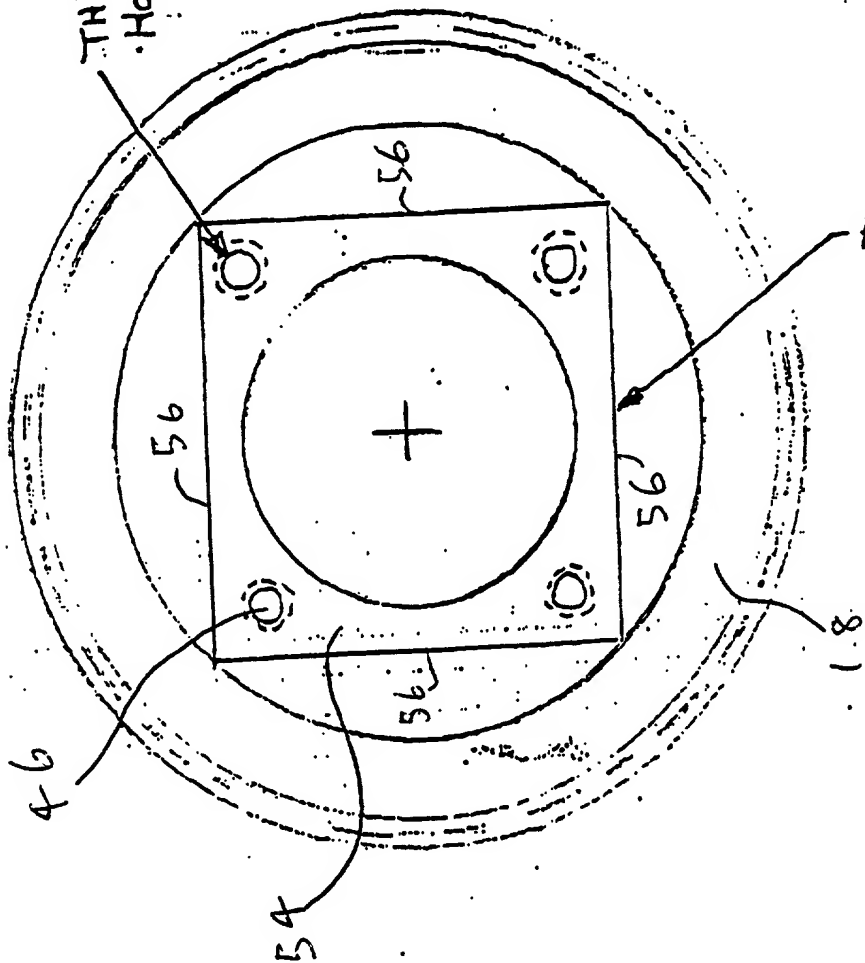

FLAT - A

Figure 7